
Way of Soft Close

Soft Close: SC-D20 POM AT L/R NEW : Special for PP Slim Seat

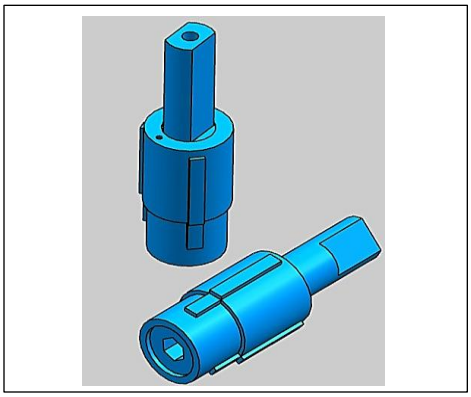


Model	Max. Torque	Direction
SC-D20-L - Cover [Adjustable Torque]	1.0 ~ 3.0 (N.M)	Clock-wise
SC-D20-R - Ring [Adjustable Torque]		Counter-Clockwise

Note: Measured at Room temperature (25^{O} C)


Specification

Operational Angle	-3.0^{O} to 110^{O}
Operating Temperature	10^{O}C ~ + 40^{O}C
Weight	15GM ±2
Body Material	POM Natural
Shaft Material	POM Natural
Oil Type	Silicone Base

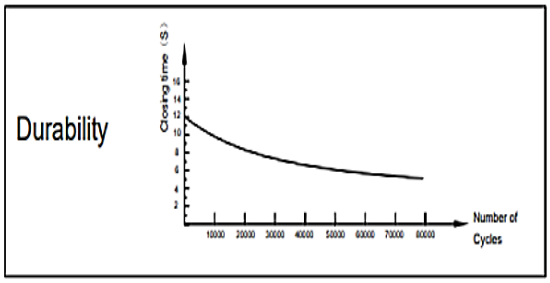


Drawing Spec

Ring [LH]

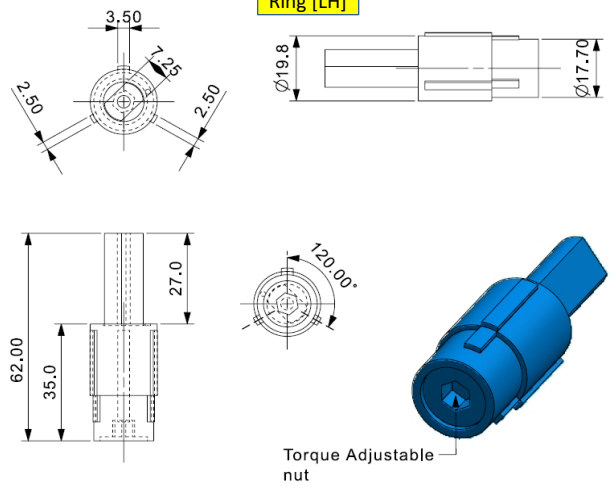

Cover [RH]

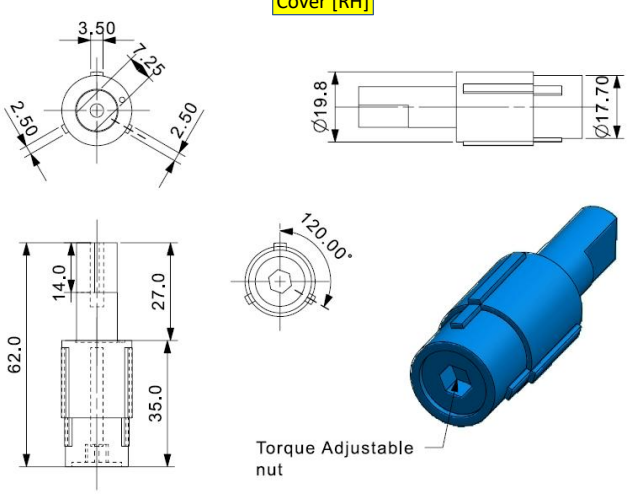

Key Product Differentiators

- Excellent performance guaranteed by ultrasonic welding sealing
- Consistent stable performance due to the fixed-torque concept
- Leakage-free design that ensures longevity & durability
- High quality material & oil to enhance performance capability
- Smooth damping performance on every use