
Way of Soft Close


Soft Close: SC-D20 POM L/R : Special for PP Slim Seat

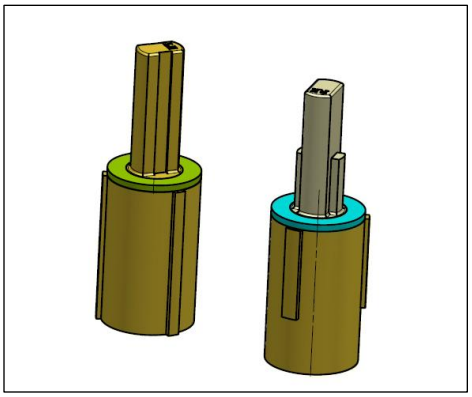


Model	Max. Torque	Direction
SC-D20-L - Cover [Fix Torque]	1.0 ~ 3.0 (N.M)	Clock-wise
SC-D20-R - Ring [Fix Torque]		Counter-Clockwise
Note: Measured at Room temperature (25^{O} C)		


Specification

Operational Angle	-3.0^{O} to 110^{O}
Operating Temperature	10^{O}C ~ + 40^{O}C
Weight	12GM ±2
Body Material	POM Natural
Shaft Material	POM Natural
Oil Type	Silicone Base

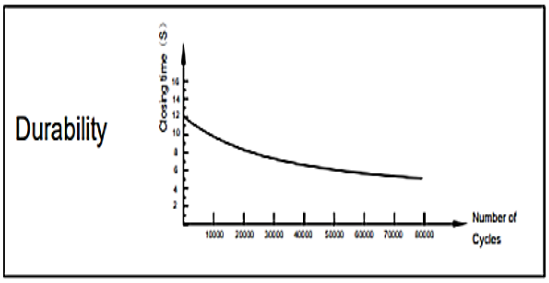

Drawing Spec

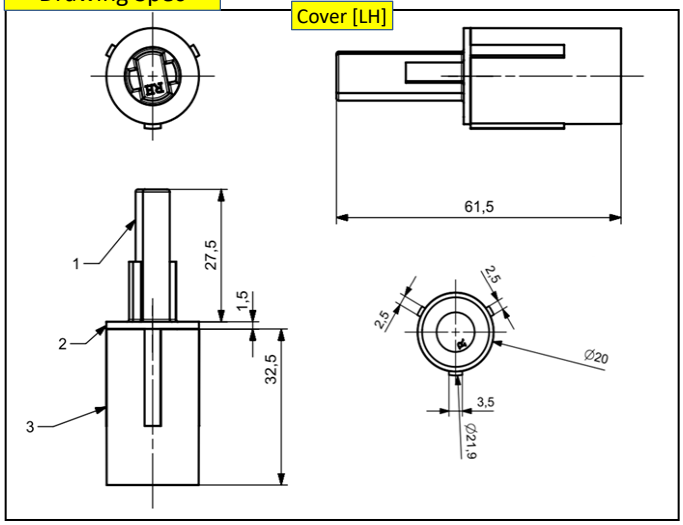

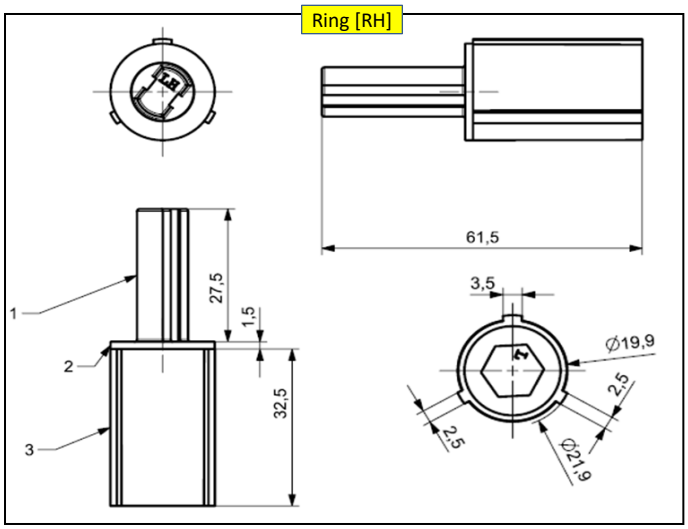

Key Product Differentiators

- Excellent performance guaranteed by ultrasonic welding sealing
- Consistent stable performance due to the fixed-torque concept
- Leakage-free design that ensures longevity & durability
- High quality material & oil to enhance performance capability
- Smooth damping performance on every use